

Overview

The Media Router 8500 (CMR-8500) is a next generation IP Encapsulator. The CMR-8500 provides a Gigabit Ethernet (GE) input port and an Asynchronous Serial Interface (ASI) output port for the encapsulation of IP datagrams using ISO/EC 13818-6 Multiprotocol Encapsulation (MPE).

Features

- Support for 80,000 IP routes
- CCM operation over ASI
- 2 GE 10/100/1000Base-T Ethernet interfaces
- 1 FE 10/100Base-T Ethernet interface
- Front panel keypad/LCD/LED user interface

Reliable Operations

- No hard drive – All firmware boots from Flash resulting in no moving parts
- High availability product
- Embedded CPU and eCOS operating system
- Over 100,000 hours MTBF
- 1:1 Redundant support

Ease of Use

- Configuration options: Terminal, HTTP or Telnet
- SNMP MIB II & Private MIB with traps

Investment Protection

- Upgrade firmware individually via TFTP or FTP

Compliance

- DVB-S (ETSI 300 421)
- DVB-S2 (ETSI EN 302 307)
- DVB Data Broadcasting (ETSI EN 301 192)

Keypad/LCD

- 2 x 20 LCD display
- Six-button user interface
 - Up
 - Down
 - Left
 - Right
 - Enter
 - Clear

Display LEDs


- STATUS (Red/Green)
- ASI IN 1 (Green Future)
- ASI IN 2 (Green Future)
- REDUN (Green Future)
- FE ACT (Yellow)
- GE1 ACT (Yellow)
- GE2 ACT (Yellow)
- MGT (Yellow)

Typical Users

- Video Distribution Service Providers
- ISPs
- Advertisement Agencies

Common Applications

- Fast Internet / intranet
- Streaming Audio / Video
- IP Multicasting
- Business TV, training, e-learning or live events
- Multicast file transfer
- Support for point-to-point Unicast transfer
- Supports transport stream over IP

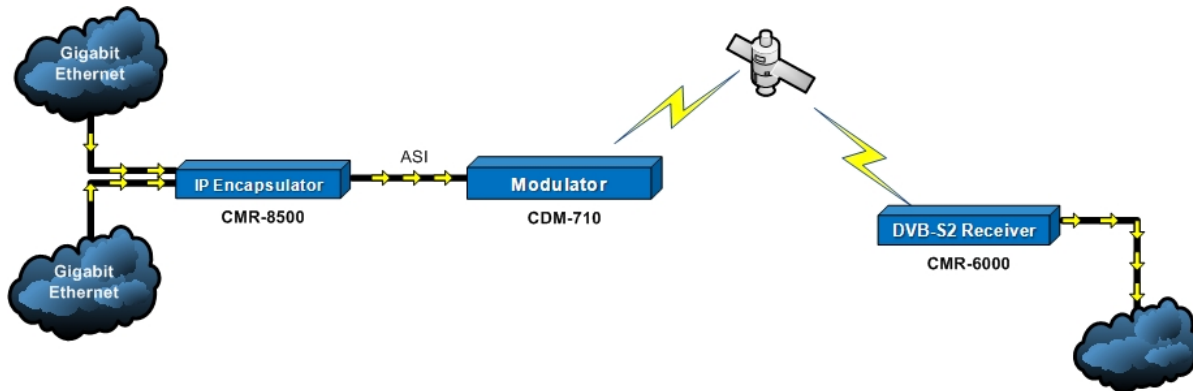

Specifications

Physical & Power

Dimensions (height x width x depth)	1.73" x 19" x 13"
Power consumption	50 W max.
Input Voltage	Universal 100 to 240 VAC 50/60 Hz

Environment

Operating temperature	0° to 40°C
Storage temperature	-30° to 65°C
Humidity	10% to 75% non-condensing

Connectors

RJ-45	FE 10/100BaseT Ethernet interface GE1 10/100/1000BaseT Ethernet Interface GE2 10/100/1000BaseT Ethernet Interface
RJ-12	Terminal (RS-232)
BNC	ASI OUT 1

Operational Support

Multicast and Unicast Routing
80,000 Simultaneous IP Routes
Section Packing enabled on a route-by-route basis

Optional Features (FAST Options)

ASI Support for CCM (default Option)	0.5 Mbps to 100 Mbps 188- or 204-byte Mode
8,192 PIDs Supported	
PSI Support for up to 1,000 IP Routes	

Performance Options

10 Mbps (default)
20 Mbps
40 Mbps
85 Mbps
100 Mbps



2114 West 7th Street, Tempe, Arizona 85281 USA
Voice: +1.480.333.2200 • Fax: +1.480.333.2540 • Email: sales@comtechefdata.com



See all of Comtech EF Data's Patents and Patents Pending at <http://patents.comtechefdata.com>

Comtech EF Data reserves the right to change specifications of products described in this document at any time without notice and without obligation to notify any person of such changes. Information in this document may differ from that published in other Comtech EF Data documents. Refer to the website or contact Customer Service for the latest released product information.