# DT-4503/C C-Band Down Converter Wide Band





# **Application**

The Comtech EF Data (CEFD) DT-4503/C Down Converter is the ultimate in high performance and cost effective C-Band frequency conversion. The DT-4503/C can be used for SCPC, DAMA, and TDMA, as well as full transponder HDTV and analog TV. Spectral purity and stability characteristics fully meet or exceed the requirements of all domestic, international, and regional commercial satellite networks.

# **High Gain**

The DT-4503/C has +20 dBm minimum output level at the 1 dB compression point and 45 dB of gain as a standard. This capability permits longer cable runs to the modem rack or compensates for elaborate splitting networks without adding expensive options such as external line amplifiers.

#### **Low Phase Noise**

The phase noise performance of the DT-4503/C exceeds the Intelsat phase noise mask for IBS and IDR services by more than 18 dB. This allows phase dependent demodulators to perform better. The close-in phase noise is very low, making the converter ideal for low bit rate digital circuits such as those used in DAMA hub earth stations.

### **Remote Control**

The remote control interface is selectable between EIA-232 and EIA-485, as well as full Ethernet including Telnet, SNMP and pre-loaded HTML GUI. All configuration control, status retrieval, and adjustments are available as simple ASCII commands through the serial interface or through the front panel menu. As a cost option, the remote control command structure can be customized in order to accommodate existing network control software.

#### **Detachable RF/IF Connector Module**

Each DT-4503/C is equipped with a detachable module that establishes input and output connections for the RF and IF paths. The module inserts into a rear compartment of the converter, and requires no additional outside space. The module includes Type N connectors for the RF path and BNC connectors at 50 or 75  $\Omega$  for the IF path.

# **Daisy Chain Redundancy Switching**

The converter uses our patented "Daisy Chain" integrated switching technology. The Daisy Chain design removes the relays associated with a centralized protection switch tray and distributes them across the individual converters. Daisy Chain technology successfully eliminates a central switching chassis, two power supplies, a microprocessor, and several long, costly cables. Widely accepted in the industry, CEFD's Daisy Chain provides both pricing and marketing advantages.

# Minimum Rack Space

Due to its small rack height (1.75 inches) and the elimination of the space penalty paid for a separate 1+N switch chassis, the DT-4503/C and the Daisy Chain switch architecture provide the most compact and cost effective converter subsystem available. The units are ideal for the construction of transportable systems such as "flyaways," and high capacity earth stations where space utilization and economy are prime considerations.



**Typical Back Panel** 



# **Specifications**

Frequency Range	3400 to 4200 MHz
Conversion	Dual, No Inversion
Step Size	125 kHz standard, 1 kHz optional
Preset Channels	32 frequencies and gains
Stability Over Time	± 1 x 10 <sup>-9</sup> /Day
Stability Over Temp	± 1 x 10 <sup>-8</sup> /Day

RF Input

Input Level	-45 dBm Typical	
Return Loss	20 dB Minimum with RF/IF Connector Module	
Impedance	50 Ω	
Noise Figure	11 dB Maximum at 0 dB Attenuation	

IF Output

Level	+20 dBm at 1 dB Compression
Range	52 to 88 or 104 to 176 MHz
_	Optional 50 to 90 MHz or 100 to 180 MHz
	(Contact factory with specific requirements)
Non-Carrier Spurious	-80 dBm
Carrier Spurious	-65 dBc at 0 dBm Output
Intermodulation	-60 dBc at 0 dBm Output SCL
Impedance	50 or 75 Ω
Return Loss	23 dB Minimum

Transfer	
Gain	45 dB ± 2 dB
Attenuation Adjust	0 to 20 in 0.25 dB Steps
	0.1 dB Steps Optional
Gain Stability	± 0.25 dB/Day
Ripple	± 0.25 dB (± 18 MHz) Optional
	± 20 MHz
	0.75 dB (± 36 MHz) Optional ± 40 MHz
	(Contact factory with specific requirements)
Slope	0.05 dB/MHz
Image Rejection	-80 dB In-band
AM to PM	0.1°/dB for Output up to -5 dBm
IF Bandwidth	36 or 72 MHz, Optional 40 or 80 MHz
	(Contact factory with specific requirements)

### **External Reference**

Input, either 5 or 10 MHz Option @ +3dBm Optional 10 MHz Rear Panel Reference Output

# **Group Delay**

Linear	0.03 ns/MHz
Parabolic	0.01 ns/MHz <sup>2</sup>
Ripple	1.0 ns Peak-to-Peak

#### Phase Noise

Frequency Offset	Limit (dBc/Hz)	Typical (dBc/Hz)
100 Hz	-80	-83
1 KHz	-89	-92
10 KHz	-95	-97
100 KHz	-105	-109
1 MHz	-120	-124

### Remote Control (Rear Panel)

Comm Port RS-485 or RS-232C, RJ-45 for Ethernet

#### Indicators (Front Panel)

Power On	Green LED
Mute	Yellow LED
Remote	Yellow LED
Reference	Yellow LED
Stored Fault	Red LED
Fault	Red LED

#### Test Points (Front Panel)

1001101110 (1101111 anoi)	
RF Sample	SMA, -20 dBc Nominal
IF Sample	BNC, -20 dBc Nominal
Optional L.O. Sample	

#### Power

Voltage	90 to 250 VAC Auto ranging, optional -48 VDC
Frequency	47 to 63 Hz
Dissipation	60 W

#### Environmental

Temperature	32 to 122°F (0 to 50°C)
Altitude	10,000 Feet MSL
Humidity	0 to 95% Relative Humidity


i ilyolodi	
Dimensions (1RU)	1.75" x 19" x 22"
(height x width x depth)	(4.45 x 48.30 x 55.90 cm)
Weight	25 lbs (11.4 kg)

#### MTBF

49,740 hrs (calculated) > 100,000 hrs. (field experience)

## Summary Alarm

Form C Relay Closure

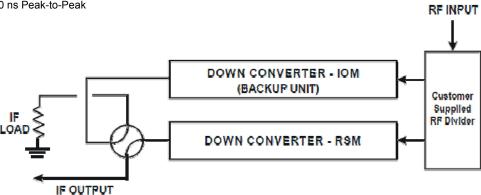

1:1 Redundant Configuration Diagram - Single Source IF Output RSM-XX Installed



2114 West 7th Street, Tempe, Arizona 85281 USA Voice: +1.480.333.2200 • Fax: +1.480.333.2540 • Email: sales@comtechefdata.com