



Overview

The LBC-4000 L-Band IF to 70 MHz IF (140 MHz optional) indoor converter is a 1RU 19-inch chassis with two front panel accessible up converter or down converter modules. It contains two diode “OR-ed” internal power supplies, for increased reliability and microprocessor-based Monitor & Control (M&C) functions.

The LBC-4000 up converter module translates a 70 MHz IF input signal (140 MHz optional) up to a user-selected frequency at L-Band (950 to 2000 MHz). The L-Band output can drive the input of the Comtech EF Data MBT-4000 block up converter or other RF equipment with an L-Band input.

The LBC-4000 down converter module translates an L-Band (950 to 2000 MHz) IF input signal down to a user selected frequency in the 70 MHz (140 MHz optional) IF band. The LBC-4000 can be locked to an internal reference or an external 5 or 10 MHz reference signal. The LBC-4000 is an excellent choice for interfacing legacy 70 or 140 MHz equipment to quad-band or tri-band block converters.

Typical Users

- Earth Stations
- Governmental Organizations

Common Applications

- Match legacy 70/140 MHz systems with L band based RF

Features

- Meets or exceeds MIL-STD-188-164A
- Low phase noise
- 1 kHz step size
- Field selectable spectral inversion
- 50 dB gain adjustment
- 70 \pm 18 MHz IF (140 \pm 36 MHz optional)
- Flexible configuration
- Auto band sensing capability
- Redundant option available

Installation

The LBC-4000 is rack mounted in a standard 19-inch equipment rack. External equipment, such as a modem, is connected to each internal converter module by a low-cost coaxial cable. A coaxial cable is also used to connect the output of each module to RF equipment either in the same location or at the antenna location.

MBT-4000 Multi-Band RF Transceiver

A companion to the LBC-4000 is Comtech EF Data's Multi-Band RF Transceiver (MBT-4000), which is designed to perform C-, X-, or Ku-Band RF to L-Band down conversion and L-Band to C-, X-, or Ku-Band RF up conversion. The MBT-4000 features:

- RF Band switching in minimal time without requiring tools
- Automatic band identification for the BUC, BDC, and antenna feed (if the feeds provide an identifying connector)
- Easy system status verification via LEDs located behind a removable cover
- Flexible configuration:
 - 2 ups
 - 2 downs
 - 1 up and 1 down
- Minimal cost for a complete system including spares
- Easy expansion for providing a redundant system or other frequency bands
- Rugged construction for mobile and transportable applications

Please refer to the MBT-4000 datasheet for additional information.

Specifications

LBC-4000 L-Band Down Converter IDU

| | |
|------------------------|---|
| Input Frequency Range | 950 to 2000 MHz, 1 kHz steps |
| Output Frequency | 70 ± 18 MHz (140 ± 36 MHz optional) |
| Input/Output Impedance | 50 Ω |
| Input Return Loss | 15 dB minimum |
| Output Return Loss | 20 dB minimum |
| Input Connector | Type N, Female |
| Output Connector | BNC, Female |
| Gain | 35 dB nominal at min. attenuation |
| Ripple | ± .5 dB over any ± 18 MHz for 70 MHz IF units ± .5 dB over any ± 36 MHz for 140 MHz IF units |
| Slope | .05 dB/MHz |
| User Attenuation Range | 0 to 40 dB, in 0.10 dB steps |
| Output Power, P1dB | +13 dBm minimum |
| Third Order Intercept | +23 dBm minimum |
| Carrier Spurious | -60 dBc |
| Non-Carrier Spurious | -60 dBm |
| Stability Over Time | ± 1 x 10 ⁻⁹ /Day |
| Stability Over Temp | ± 1 x 10 ⁻⁸ 32 to 122°F (0 to 50°C) |

LBC-4000 L-Band Up Converter IDU

| | |
|------------------------|---|
| Input Frequency | 70 ± 18 MHz (140 ± 36 MHz optional) |
| Output Frequency | 950 to 2000 MHz, 1 kHz steps |
| Input/Output Impedance | 50 Ω |
| Input Return Loss | 18 dB minimum |
| Output Return Loss | 15 dB minimum |
| Input Connector | BNC, Female |
| Output Connector | N Female |
| Gain | 25 ± 1 dB nominal at minimum attenuation |
| Ripple | ± .5 dB over any ± 18 MHz for 70 MHz IF units ± .5 dB over any ± 36 MHz for 140 MHz IF units |
| Slope | .05 dB/MHz |
| User Attenuation Range | 0 to 50 dB, in 0.10 dB steps |
| Input Power Level | To +10 dBm, maximum |

| | |
|-----------------------|--|
| Output Power, P1dB | +10 dBm minimum |
| Third Order Intercept | +20 dBm minimum |
| Carrier Spurious | -60 dBc |
| Non-Carrier Spurious | -75 dBm |
| Transmit Phase Noise | Exceeds MIL-STD-188-164A |
| Stability Over Time | ± 1 x 10 ⁻⁹ /Day |
| Stability Over Temp | ± 1 x 10 ⁻⁸ 32 to 122°F (0 to 50°C) |

Phase Noise

| Frequency Offset | Up Converter (Guaranteed / Typical) | Down Converter (Guaranteed / Typical) |
|------------------|-------------------------------------|---------------------------------------|
| 100 Hz | -76/-79 dBc/Hz | -75/-78 dBc/Hz |
| 1000 Hz | -79/-82 dBc/Hz | -76/-79 dBc/Hz |
| 10000 Hz | -86/-89 dBc/Hz | -87/-90 dBc/Hz |
| 100000 Hz | -107/-110 dBc/Hz | -110/-113 dBc/Hz |
| 1 MHz | -122/-125 dBc/Hz | -126/-129 dBc/Hz |

Physical & Environmental


| | |
|---------------------------|-----------------------------|
| Operating Temperature | -0° to +50°C (32 to 122°F) |
| Operating Altitude | 10,000 ft above sea level |
| Operating Humidity | 5 to 95 non-condensing |
| Non-Operating Temperature | 58° to 160°F (-50 to +71°C) |
| Dissipation | 35 W total, 2 converters |
| Prime Power | 90 to 260 VAC, 47 to 63 Hz |
| Dimensions (1RU) | 1.75" x 19" x 22" |
| (height x width x depth) | (4.45 x 48.30 x 55.90 cm) |
| Weight | 25 lbs (11.34 kg) maximum |

External Reference

| | |
|-----------------|--------------------------|
| Input Frequency | 5 or 10 MHz, Auto detect |
| Input Level | ± 5 dBm |
| Input Impedance | 50 Ω |

Monitor & Control

| | |
|----------------------|----------------------------------|
| Serial M&C Interface | TIA/EIA-232, TIA/EIA-485, 4-wire |
| Serial Connector | 9-pin D, Female |
| Alarm Contacts | 3 Form C summary |
| Alarm Connector | 9-pin D, Female |

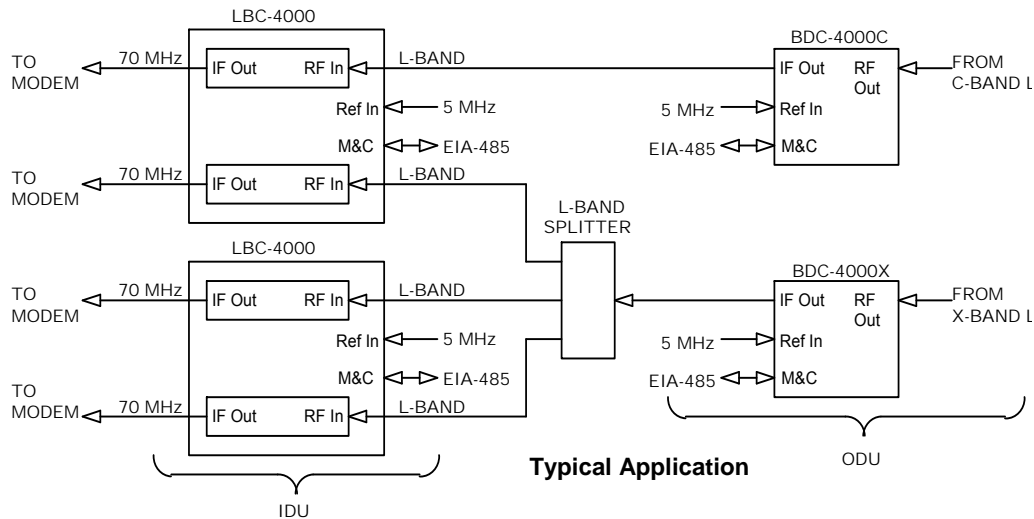

2114 West 7th Street, Tempe, Arizona 85281 USA
Voice: +1.480.333.2200 • Fax: +1.480.333.2540 • Email: sales@comtechefdata.com



See all of Comtech EF Data's Patents and Patents Pending at <http://patents.comtechefdata.com>

Comtech EF Data reserves the right to change specifications of products described in this document at any time without notice and without obligation to notify any person of such changes. Information in this document may differ from that published in other Comtech EF Data documents. Refer to the website or contact Customer Service for the latest released product information.